



PRODUCT DATA SHEET

CH6I Sensor

Low Frequency & Low Noise Integral Preamp Sensor



DESCRIPTION AND FEATURES

The CH6I sensor is a low frequency, resonant, acoustic emission sensor with an integral, low noise, filtered, 40 dB preamplifier, that can drive up to 3000 feet of cable. The sensor comes standard with PAC's unique "Auto Sensor Test" (AST*) function.

The CH6I features a strong, insulated, lightweight, aluminum alloy, integrated body structure that is color-coded green to identify the sensor model. This sensor's outside shell is anodized, providing a nonconductive finish to prevent any possible electric shorts from metal testing structures. It is the same size and has the same frequency response and sensitivity as the older R6I sensor. The EMI shielding ability of the CH6I has been improved by more than 300% compared with previous versions.

APPLICATIONS

- Metal, concrete and composite structures that require an AE sensor response below 100 kHz
- Ideal for fiberglass structure tests (i.e. bucket trucks, storage tanks)
- Pipeline testing, where long distance sensor monitoring is a must
- Leak detection for large sensor spacing

OPERATING SPECIFICATIONS

Dynamic

Peak Sensitivity, Ref V/(m/s).....	117 dB
Peak Sensitivity, Ref V/µbar.....	-23 dB
Operating Frequency Range.....	40-100 kHz
Resonant Frequency, Ref V/(m/s).....	55 kHz
Resonant Frequency, Ref V/µbar.....	98 kHz
Directionality.....	+/-1.5 dB

Electrical

Gain.....	40 dB
Power Requirements.....	16-30 Vdc @ 25 mA
Dynamic Range.....	>80 dB
Output Voltage.....	20 V peak to peak
Noise Level (RMS tri).....	<2.4 µV
Output Drive Impedance.....	50 Ω
Sensor Drive Capability.....	up to 3000 ft (1000 m)
AST Pulse.....	24 V, 3 microseconds into crystal
Grounding.....	Case grounded, isolated from sensing face

Environmental

Temperature Range.....	-35 to 75°C
Shock Limit.....	500 g
Completely enclosed crystal for RFI/EMI immunity	

Physical


Dimensions.....	1.13"OD X 1.54"H
	29 mm OD X 39.2 mm H
Weight.....	56 grams
Case Material.....	Green color, anodized aluminum alloy
Face Material.....	Ceramic
Connector.....	BNC
Connector Locations.....	Side
Seal.....	Epoxy
Matching Cable.....	1234-X

ORDERING INFORMATION AND ACCESSORIES

Cable (specify length in 'XX' m at end of PN).....	1234 - X
Magnetic Hold-Down.....	MHR6I
Amplifier Subsystems.....	AE2A

Sensors include

NIST Calibration Certificate & Warranty

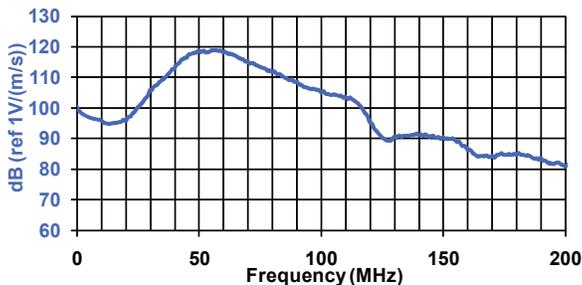

WORLDWIDE HEADQUARTERS:
195 Clarksville Rd •
Princeton Jct, NJ 08550 • USA
T: +1.609.716.4000 • F: +1.609.716.0706
E-MAIL: sales.systems@mistrasgroup.com

CANADA T: +1.403.556.1350
CHINA T: +86.10.5877.3631
FRANCE T: +331.498.26040
GERMANY T: +49.040.2000.4025
GREECE T: +30.210.2846.801-4

HOLLAND T: +31.010.245.0325
INDIA T: +91.22.2586.2444
JAPAN T: +81.33.498.3570
MALAYSIA T: +60.9.517.3788
MIDDLE EAST T: +973.17.729.356

RUSSIA T: +7495.789.4549
SCANDINAVIA T: +46(0)31.252040
S. AMERICA T: +55.11.3082.5111
UK T: +44(0)1954.231.612