


## PRODUCT DATA SHEET

### F30I-AST Sensor

#### Integral Pre-amplifier Sensor




#### DESCRIPTION AND FEATURES

The F-series sensors are designed to incorporate the latest advances in materials and transducer design principles. These sensors unlike the resonant sensors (R-series) have a very high sensitivity and flat response in the bandwidth of operation. The F30I is an integral pre-amplifier wideband sensor with a flat frequency response over the range of 150 – 700 kHz. This sensor is an ideal candidate for applications requiring high bandwidth for frequency analysis of the AE signals for noise discrimination and source identification. This sensor features a rugged steel construction and an SMA connector exiting from the side of the sensor.

#### APPLICATIONS

This sensor is well suited for structural health monitoring of large structures like storage tanks, pipelines etc. Flat response of these sensors help eliminate the sharp rise and fall in the sensitivity with frequency commonly seen in resonant sensors, providing additional information for engineers to analyze. Wideband sensors are well suited for research applications where a high fidelity AE response is required. It can be easily mounted using epoxy.

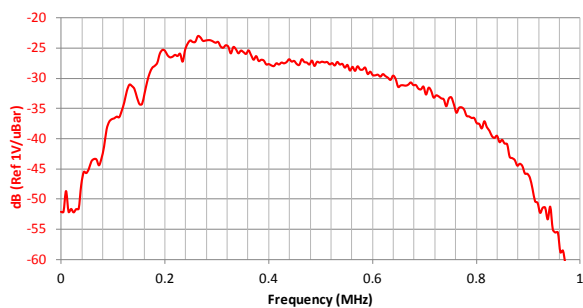

#### OPERATING SPECIFICATIONS

##### Dynamic

Peak Sensitivity, Ref V/(m/s).....	98 dB
Peak Sensitivity, Ref V/μbar.....	-23 dB
Operating Frequency Range.....	150-700 kHz
Resonant Frequency, Ref V/(m/s).....	300 kHz
Resonant Frequency, Ref V/μbar.....	300 kHz
Directionality.....	+/-1.5 dB

##### Environmental

Temperature Range.....	-35 to 75°C
Shock Limit.....	500 g
Completely enclosed crystal for RFI/EMI immunity	

##### Physical

Dimensions.....	1.125"OD X 1.25"H
	28.5 mm OD X 31.8 mm H
Weight.....	70 grams
Case Material.....	Stainless steel
Face Material.....	Ceramic
Connector.....	BNC
Connector Locations.....	Side

##### Electrical

Gain.....	40 dB
Power Requirements.....	20-30 VDC @ 25 mA
Dynamic Range.....	> 87 dB
Noise Level (RMS RTI).....	< 3 μV
Output Drive Impedance.....	50 Ω
Grounding.....	Case Grounding, Isolated from mounting surface

#### ORDERING INFORMATION AND ACCESSORIES

F30I-AST.....	F30I-AST
Cable (specify length in 'm').....	1234-X
Magnetic Hold-Down.....	MHR15A
Pre-amplifier.....	0/2/4, 2/4/6

##### Sensors include

NIST Calibration Certificate & Warranty



**WORLDWIDE HEADQUARTERS:**  
195 Clarksville Rd •  
Princeton Jct, NJ 08550 • USA  
T: +1.609.716.4000 • F: +1.609.716.0706  
E-MAIL: sales.systems@mistrasgroup.com

**CANADA** T: +1.403.556.1350  
**CHINA** T: +86.10.5877.3672  
**FRANCE** T: +331.498.26040  
**GERMANY** T: +49.040.2000.4025  
**GREECE** T: +30.210.2846.801

**HOLLAND** T: +31.010.245.0325  
**INDIA** T: +91.22.2586.2444  
**JAPAN** T: +81.33.498.3570  
**MIDDLE EAST** T: +44(0)1954.231.612  
**RUSSIA** T: +7495.789.4549

**SCANDINAVIA** T: +46(0)31.252040  
**S. AMERICA** T: +55.11.3082.5111  
**UK** T: +44(0)1954.231.612